


GS Series 1~12KW



Features:

- ◆ GS Series AC/Solar charging Off grid Hybrid Inverter.
- ◆ LED/LCD display, Enhanced functions setting via LCD, Man-machine intelligent design.
- ◆ Built-in 40A/60A optional MPPT solar charger controller.
- ◆ LCD shows the solar capacity.
- ◆ 5 stages adjustable AC charging current. AC charging also can be closed.
- ◆ AC/DC priority modes can be set.
- ◆ Generator restart signal(Dry contact).
- ◆ 3 times peak power. Strong loading capacity.
- ◆ Overload, output short-circuit protection.

Application:

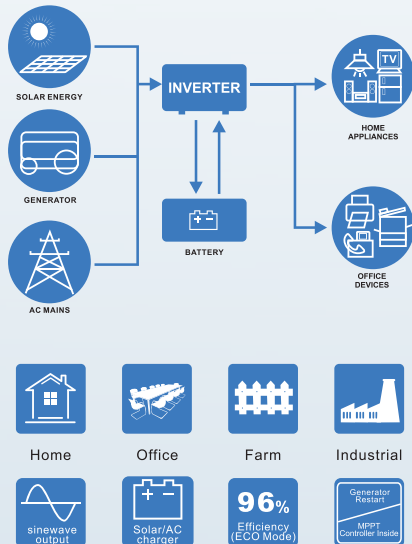

Specifications

Pure Sine Wave Hybrid charger Inverter

Model	GS1000	GS2000	GS3000	GS4000	GS5000	GS6000	GS8000	GS10KW	GS12KW
Power Rating	1000W	2000W	3000W	4000W	5000W	6000W	8000W	10KW	12KW
AC Input	Input Voltage/Waveform: Sinusoidal(utility or generator) Nominal input Voltage: 120/230VAC Low Line Disconnect: 85Vac±4%(Normal) or 80Vac±4%(Wide) for 120Vac; 184Vac±4%(Normal) or 135Vac±4%(Wide) for 230Vac Low Line Re-connect: 95Vac±4%(Normal) or 85Vac±4%(Wide) for 120Vac; 194Vac±4%(Normal) or 145Vac±4%(Wide) for 230Vac High Line Disconnect: 136Vac±4%(Normal) or 145Vac±4%(Wide) for 120Vac; 263Vac±4%(Normal) or 263Vac±4%(Wide) for 230Vac Max AC input Voltage: 120Vac for Max150Vac, 230Vac for Max270Vac Frequency: 50Hz:41-54Hz, 60Hz:51-64Hz								
AC Charger	Nominal Charge Current: 20A/35A/50A/70A/90A(5 stages adjustable charging current) Over Charge Protection: Bat.V≥15.5VDC for 12V battery; Bat.V≥31.0VDC for 24V battery, Bat.V≥62.0VDC for 48V battery; beeps 0.5s every 1s & fault after 60s								
Solar Charger	Rated Charge Current: 40A, 60A, 60A, 60A, 60A, 60A, 60A, 60A PV Input Voltage range: 15VDC-40VDC for 12VDC, 25VDC-75VDC for 24VDC, 55-145VDC for 48V Max.PV open circuit array voltage: 12V for 40VDC, 24V for 75VDC, 48V for 145VDC Charger mode: MPPT PV Low Voltage Re-connect: PV≥Bat.V=3V PV Low Voltage Disconnect: PV≤Bat.V Efficiency: ≥97%								
Charger	Nominal Charger Current: 20A/35A/50A/70A/90A(According to the inverter model), 5 stages adjustable charging current Over charge Protection: Bat.V≥15.5VDC/31VDC/62VDC,beeps 0.5s every 1s & fault after 60s								
Efficiency	Efficiency (Battery Mode): ≥87% Efficiency (Line Mode): >98%								
Battery Voltage	Nominal DC Input Voltage: 12/24/48VDC Low Battery Alarm: 10.5VDC±0.3VDC for 12VDC, 21VDC±0.6VDC for 24VDC, 42VDC±1.2VDC for 48VDC Low DC input shut-down: 10VDC±0.3VDC for 12VDC, 20VDC±0.6VDC for 24VDC, 40VDC±1.2VDC for 48VDC High DC input Alarm & Fault: 16VDC±0.3VDC for 12VDC, 32VDC±0.6VDC for 24VDC, 64VDC±1.2VDC for 48VDC								
Transfer Time	AC to DC: 20ms(max) DC to AC: 15ms(max)								
System Parameter	Over-Load Protection: 110%<load<150%, beeps 0.5s every 1s, and Fault after 60s off the output, load>150%, beeps 0.5s every 1s, and Fault after 20s Output Short Circuit Protection: Current limit(Fault after 10s) Surge Rating(10s): 1:3(VA) Power Saver: Loads≤25W(Enabled on "P/S auto"Setting of Remote control) Protections: Low battery,over charging,over load,over temp Indicators: LED+LCD Display								
General Specifications	Operating Temperature Range: 0°C to 40°C Storage Temperature: -15°C~60°C Operation humidity: 5% to 95%(non-condensing) Audible Noise: 60dB max cooling: Forced air,variable speed fan Dimension(L*W*H): 480*336*190mm, 530*400*190mm, 627*416*204mm Net Weight(kg): 19.5kg, 23.5kg, 28.0kg, 30.0kg, 35.5kg, 39.0kg, 52.5kg, 58.5kg, 66.5kg								

◆ Product specifications are subject to change without further notice.